


# APO-DIGITAR 5.6/120 M


## MODULATION als Funktion der relativen Bildgröße

Wellenlänge $\lambda$ [nm] :	520	670	620	570	470	420
Spektrale Gewichtung [%] :	19.0	10.0	19.0	19.0	19.0	14.0
Ortsfrequenz $R$ [1/mm] :	20	40	60			
Format [mm X mm] :	49.5	X	49.5			
Diagonale $2u'$ [mm] :	70.0					


radial —  
 tangential - -

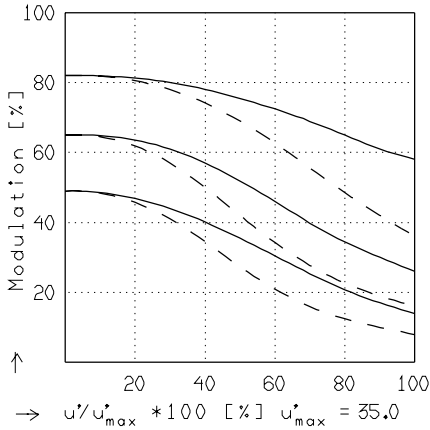


$f' = 119.9$   $k = 11.0$   $1/b' = -10.00$   $00' = 1449.$

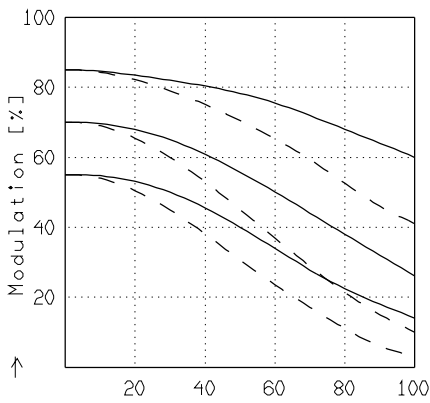


$f' = 119.9$   $k = 8.0$   $1/b' = -3.00$   $00' = 638.$

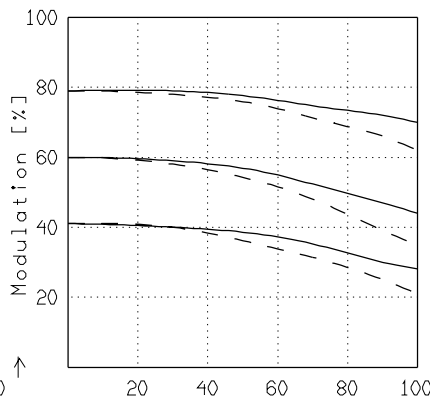


$f' = 119.9$   $k = 11.0$   $1/b' = -3.00$   $00' = 638.$

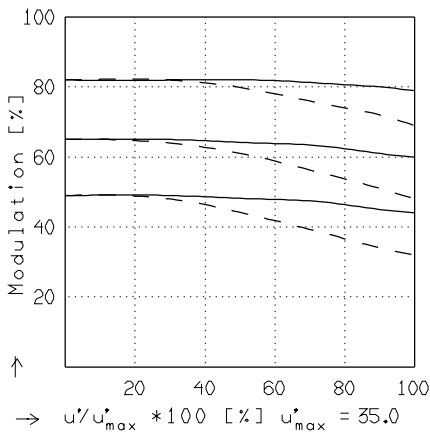

$f' = 119.9$   $k = 5.6$   $1/b' = -1.00$   $00' = 478.$

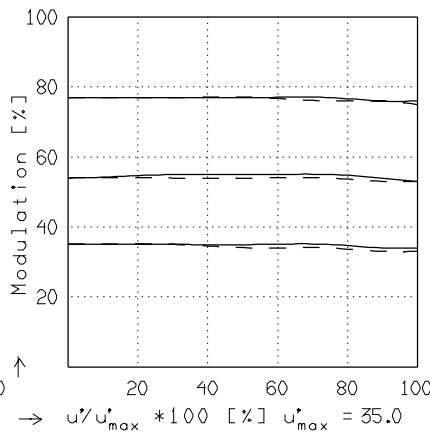

$f' = 119.9$   $k = 8.0$   $1/b' = -1.00$   $00' = 478.$

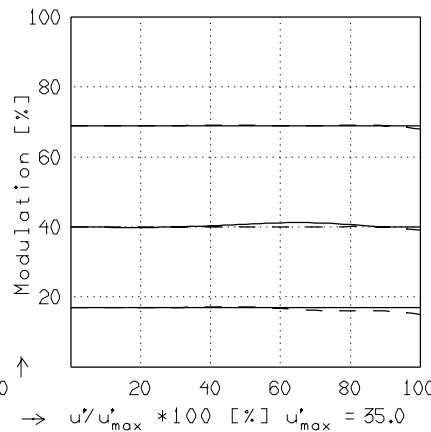

$f' = 119.9$   $k = 11.0$   $1/b' = -1.00$   $00' = 478.$

Fokussierung  $MTF_{max}$  bei  $k = 5.6$  ,  $R = 60$  1/mm.  $u'/u'_{max} = 0$

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

0.180

Bedruckt in der Bundesrepublik Deutschland

0.070

0.070

0.070

0.070