


APO-SYMMAR 5.6/150


MODULATION als Funktion der relativen Bildgröße

Wellenlänge λ [nm] :	546	644	588	480	436	405
Spektrale Gewichtung [%] :	24.6	18.6	22.1	12.4	15.2	7.1
Ortsfrequenz R [1/mm] :	5	10	20			
Bild- \emptyset $k = 5.6$ [mm X mm] :	182.2					
Bild- \emptyset $k = 22.0$ [mm] :	220.0					


radial —
tangential - -

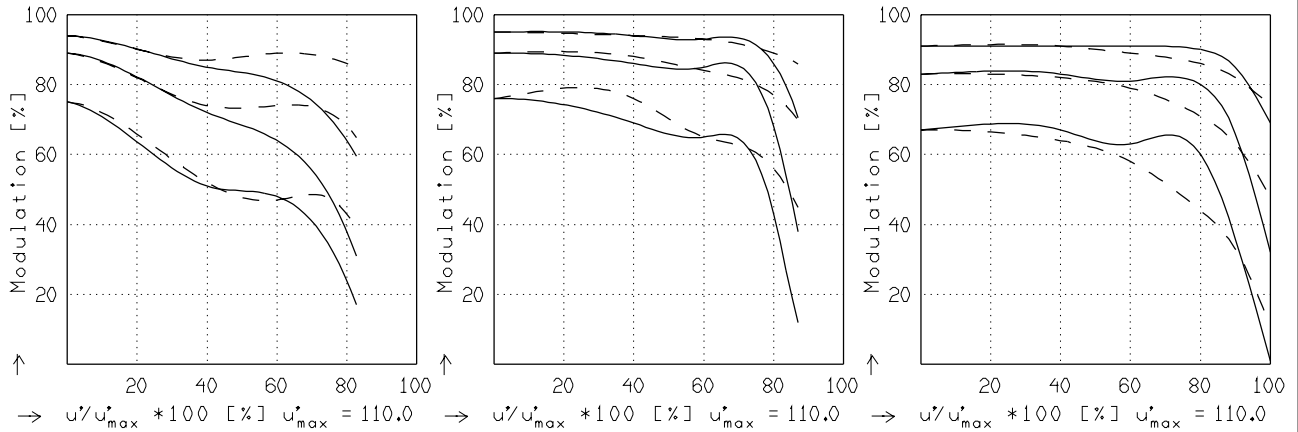

$f' = 151.5 \quad k = 5.6 \quad 1/\beta' = \infty \quad 00' = \infty$ $f' = 151.5 \quad k = 11.0 \quad 1/\beta' = \infty \quad 00' = \infty$ $f' = 151.5 \quad k = 22.0 \quad 1/\beta' = \infty \quad 00' = \infty$

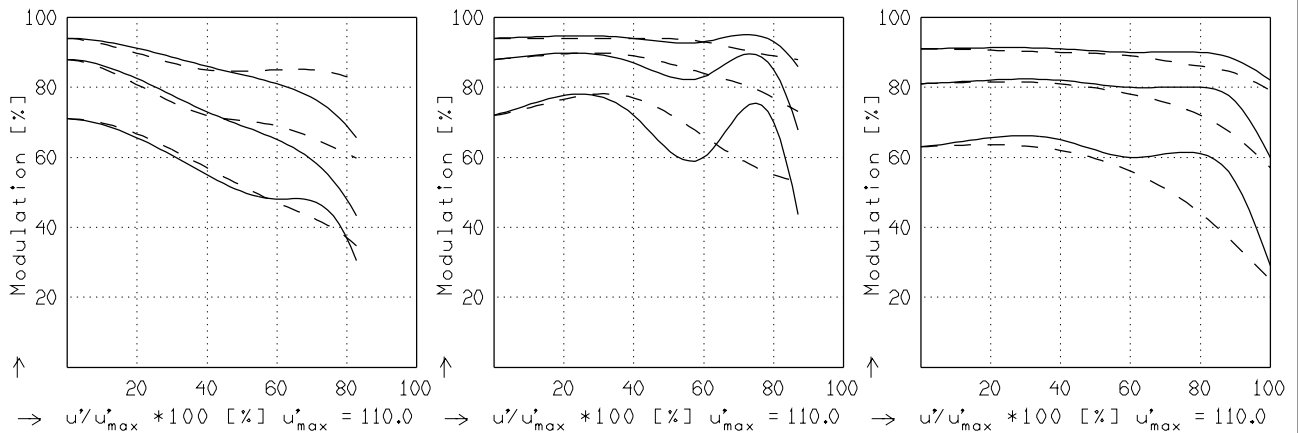

$f' = 151.5 \quad k = 5.6 \quad 1/\beta' = -10.00 \quad 00' = 1829$ $f' = 151.5 \quad k = 11.0 \quad 1/\beta' = -10.00 \quad 00' = 1829$ $f' = 151.5 \quad k = 22.0 \quad 1/\beta' = -10.00 \quad 00' = 1829$

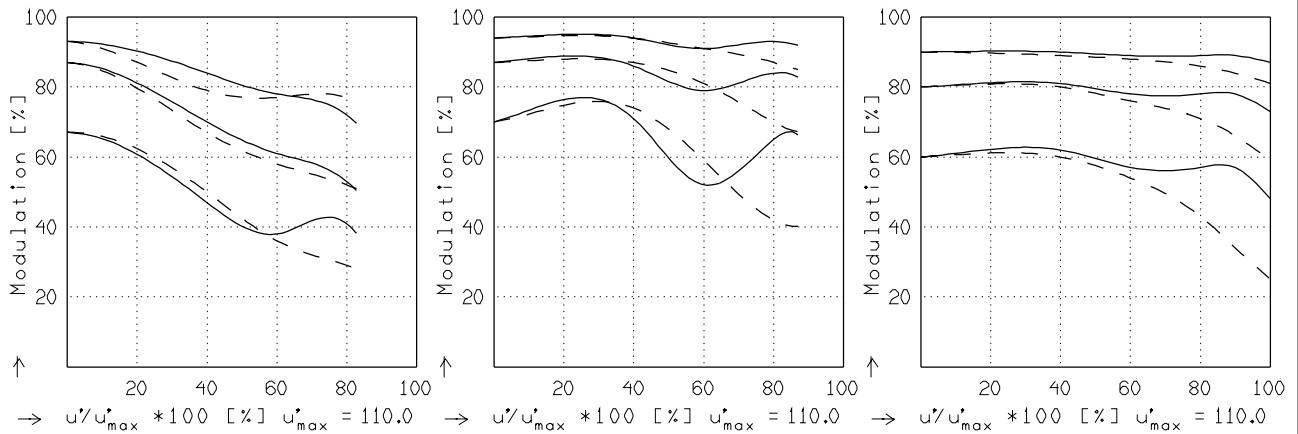

$f' = 151.5 \quad k = 5.6 \quad 1/\beta' = -5.00 \quad 00' = 1087$ $f' = 151.5 \quad k = 11.0 \quad 1/\beta' = -5.00 \quad 00' = 1087$ $f' = 151.5 \quad k = 22.0 \quad 1/\beta' = -5.00 \quad 00' = 1087$

Fokussierung MTF_{max} bei $k = 5.6$, $R = 20$ 1/mm , $u'/u'_{max} = 0$

44515 (30600) Gedruckt in der Bundesrepublik Deutschland