


**APO-SYMMAR 5.6/300 L**


**MODULATION** als Funktion der relativen Bildgröße

Wellenlänge $\lambda$	[nm]	546	644	588	480	436	405
Spektrale Gewichtung	[%]	24.6	18.6	22.1	12.4	15.2	7.1
Ortsfrequenz $R$	[1/mm]	5	10	20			
Format	[mm X mm]	240.0	X300.0				
Diagonale $2u'$	[mm]	430.0					


radial —  
 tangential - -

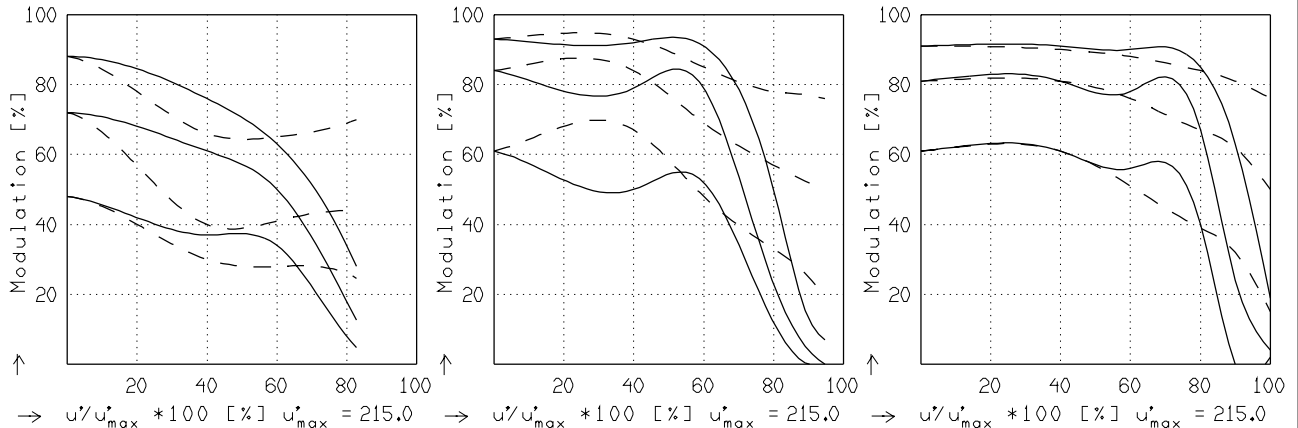

$f' = 296.2$   $k = 5.6$   $1/b' = \infty$   $00' = \infty$    
  $f' = 296.2$   $k = 11.0$   $1/b' = \infty$   $00' = \infty$    
  $f' = 296.2$   $k = 22.0$   $1/b' = \infty$   $00' = \infty$

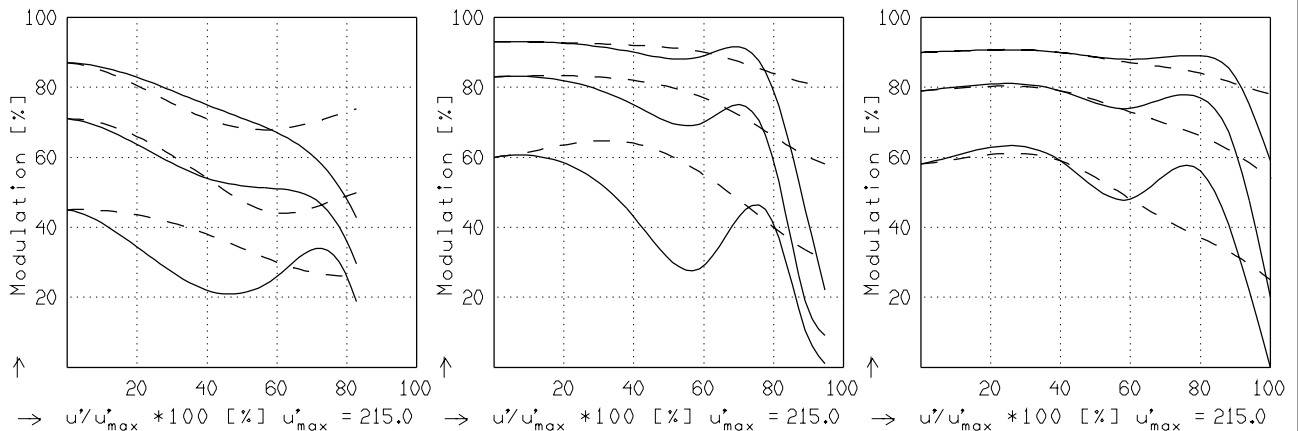

$f' = 296.2$   $k = 5.6$   $1/b' = -10.00$   $00' = 3579.$    
  $f' = 296.2$   $k = 11.0$   $1/b' = -10.00$   $00' = 3579.$    
  $f' = 296.2$   $k = 22.0$   $1/b' = -10.00$   $00' = 3579.$

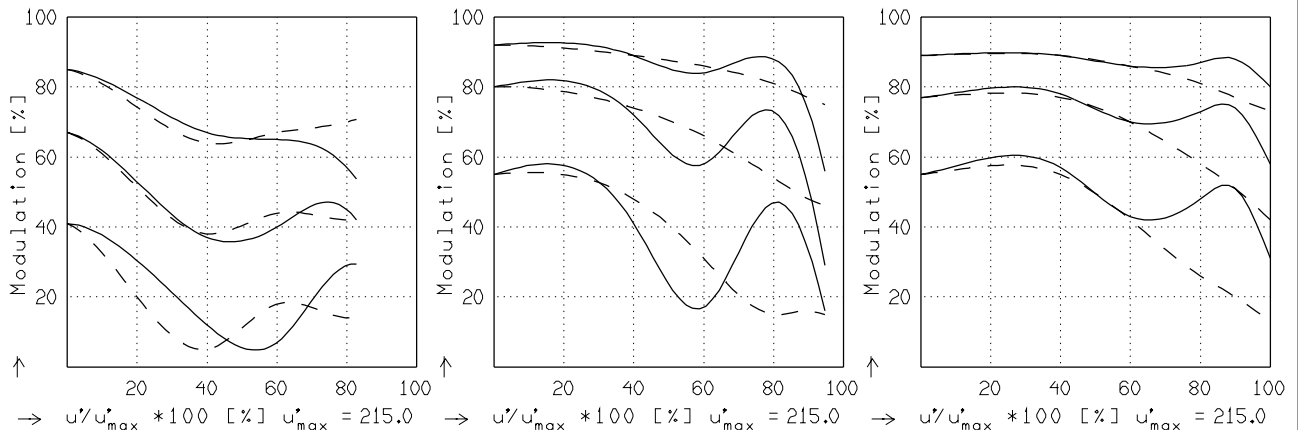

$f' = 296.2$   $k = 5.6$   $1/b' = -5.00$   $00' = 2128.$    
  $f' = 296.2$   $k = 11.0$   $1/b' = -5.00$   $00' = 2128.$    
  $f' = 296.2$   $k = 22.0$   $1/b' = -5.00$   $00' = 2128.$

Fokussierung  $MTF_{max}$  bei  $k = 5.6$  ,  $R = 20$  1/mm,  $u'/u'_{max} = 0$

47575 181102    Gedruckt in der Bundesrepublik Deutschland