
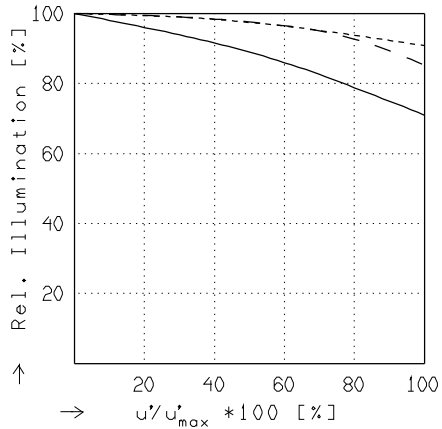


CINELUX PREMIERE 1.7/40. ASPH.

$f' = 39.9 \text{ mm}$ $\beta_p = 5.255$
 $s_F = 17.8 \text{ mm}$ $s_{EP} = 25.4 \text{ mm}$
 $s_{F'} = 34.5 \text{ mm}$ $s_{A'P} = -175.3 \text{ mm}$
 $HH' = 34.4 \text{ mm}$ $\Sigma d = 97.5 \text{ mm}$

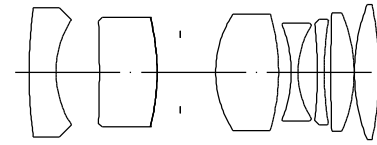


RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$f / 1.8$


— $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$
 - - $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$
 - - - $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$

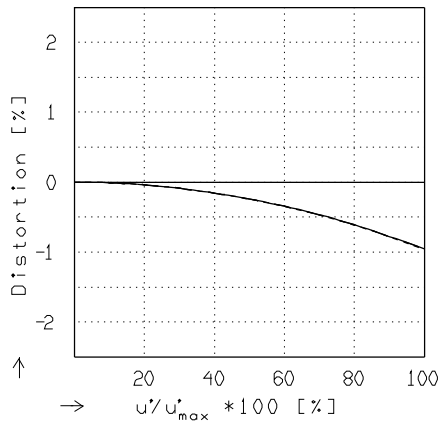

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

— $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$
 - - $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$
 - - - $\beta' = 0.0000$ $u'_{max} = 11.8$ $00' = \infty$

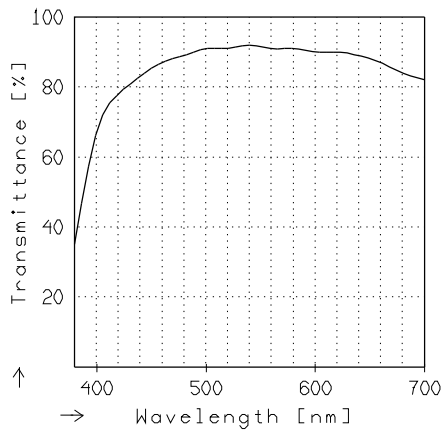

TRANSMITTANCE




Relative spectral transmittance is shown with reference to wavelength.

CINELUX PREMIERE 1.7/40. ASPH.

MODULATION with reference to the relative image height

Wavelength λ	[nm] :	546	644	610	570	510	480
Spectral weighting	[%] :	28.3	4.5	17.8	29.4	16.0	4.0
Spatial frequency R	[1/mm] :	20	40	80			
Image- \emptyset f / 1.8	[mm] :	23.8					
Image- \emptyset f / 1.8	[mm] :	23.8					

radial —
 tangential - -

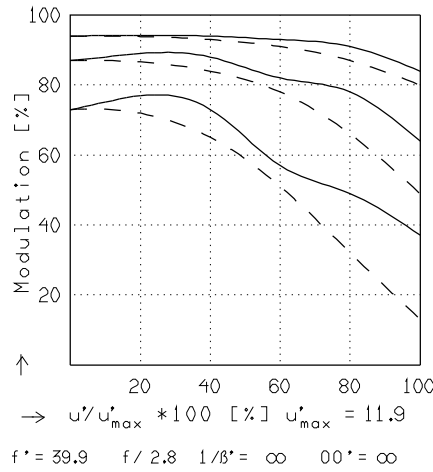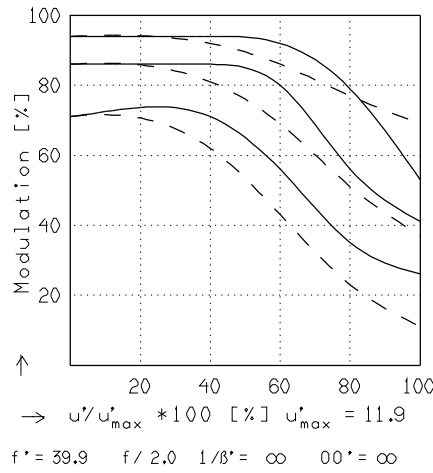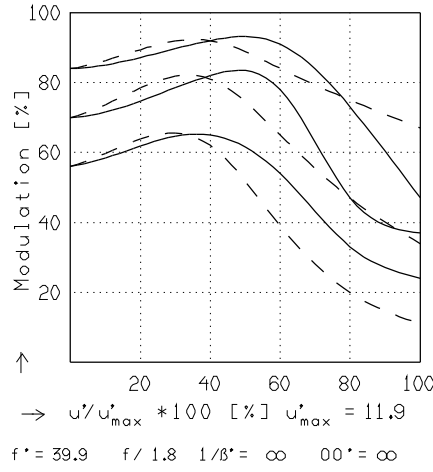

Focusing : MTF_{max} at f / 1.7 , R = 40 1/mm, $u'/u'_{max} = 0$

0.025

0.025

0.025

47890 180407 Printed in the Federal Republic of Germany